


## Escape Door Systems Lock Packages

### 351U80 — Surface Mounted, No Delay

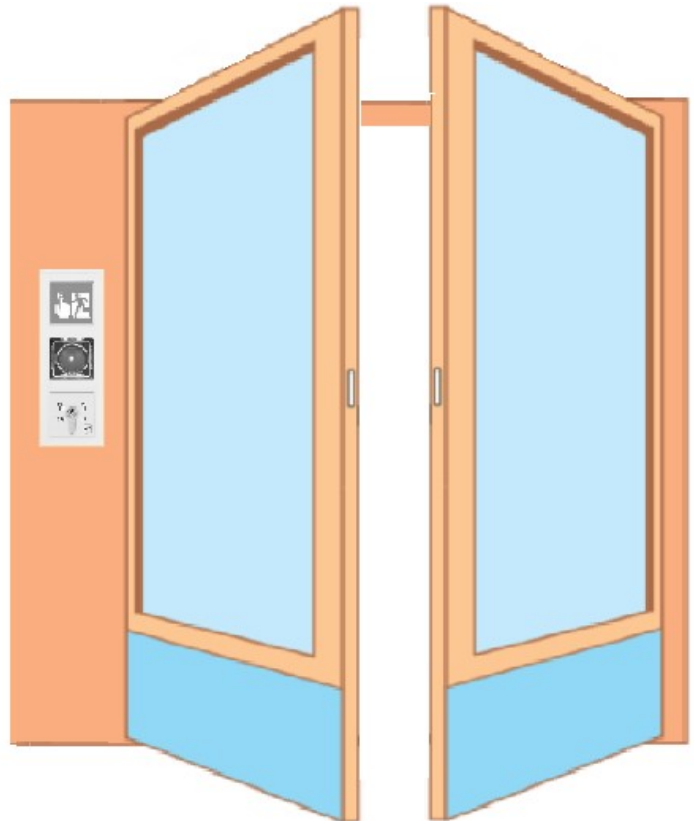

## Standard Double Door

### No-Delay—Complies with BS EN 13637

|            |                           |  |
|------------|---------------------------|--|
| <b>QTY</b> | <b>EDS351-ND-DBL-S-44</b> |  |
| 1          | 1386-12B7--04S0           | EDS - 1386 ERT SURFACE 12-24VDC WHITE              |
| 2          | 351U80-SET44F91VA46       | NEW ESCAPE LOCK W/LOCKING SNIB 24V C/W 44MM STRIKE |
| 1          | 1386S00VT—00              | EDS INTERFACE FOR LOCKING DEVICE                   |
|            | <b>EDS351-ND-DBL-S-54</b> |  |
| 1          | 1386-12B7--04S0           | EDS - 1386 ERT SURFACE 12-24VDC WHITE              |
| 2          | 351U80-SET54F91VA46       | NEW ESCAPE LOCK W/LOCKING SNIB 24V C/W 54MM STRIKE |
| 1          | 1386S00VT—00              | EDS INTERFACE FOR LOCKING DEVICE                   |

#### Technical Specification:

Voltage—24V

Voltage Rating—24V DC +/- 2V

Break In Resistance—5000N

Monitoring Contact and Armature Contact Integrated

Fail Unlocked—Yes


Non Handed

#### **Standards:**

BS EN 13637 Electrically Controlled Exit Systems



**Escape Door Systems Lock Packages**  
**351U80 — Flush Mounted, No Delay**

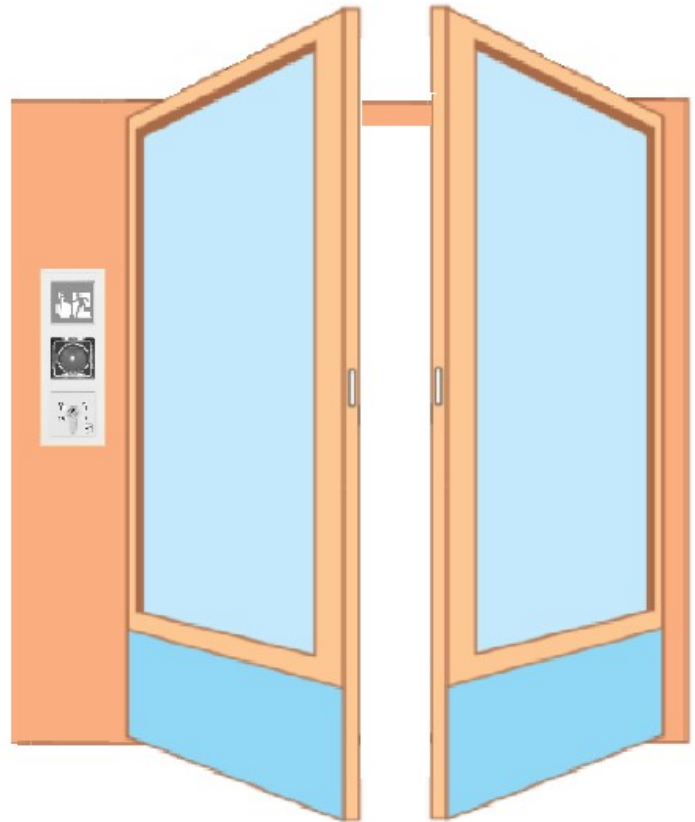

**Standard Double Door**

**No-Delay—Complies with BS EN 13637**

|            |                           |  |
|------------|---------------------------|--|
| <b>QTY</b> | <b>EDS351-ND-DBL-F-44</b> |  |
| 1          | 1386-12B73-04S0           | EDS - 1386 ERT FLUSH 12-24VDC WHITE                |
| 2          | 351U80-SET44F91VA46       | NEW ESCAPE LOCK W/LOCKING SNIB 24V C/W 44MM STRIKE |
| 1          | 1386S00VT—00              | EDS INTERFACE FOR LOCKING DEVICE                   |
|            | <b>EDS351-ND-DBL-F-54</b> |  |
| 1          | 1386-12B73-04S0           | EDS - 1386 ERT FLUSH 12-24VDC WHITE                |
| 2          | 351U80-SET54F91VA46       | NEW ESCAPE LOCK W/LOCKING SNIB 24V C/W 54MM STRIKE |
| 1          | 1386S00VT—00              | EDS INTERFACE FOR LOCKING DEVICE                   |



**Technical Specification:**

Voltage—24V  
Voltage Rating—24V DC +/- 2V  
Break In Resistance—5000N  
Monitoring Contact and Armature Contact Integrated  
Fail Unlocked—Yes  
Non Handed

**Standards:**  
BS EN 13637 Electrically Controlled Exit Systems




**Escape Door Systems Lock Packages**  
**DC700F—Surface Mounted, No Delay**

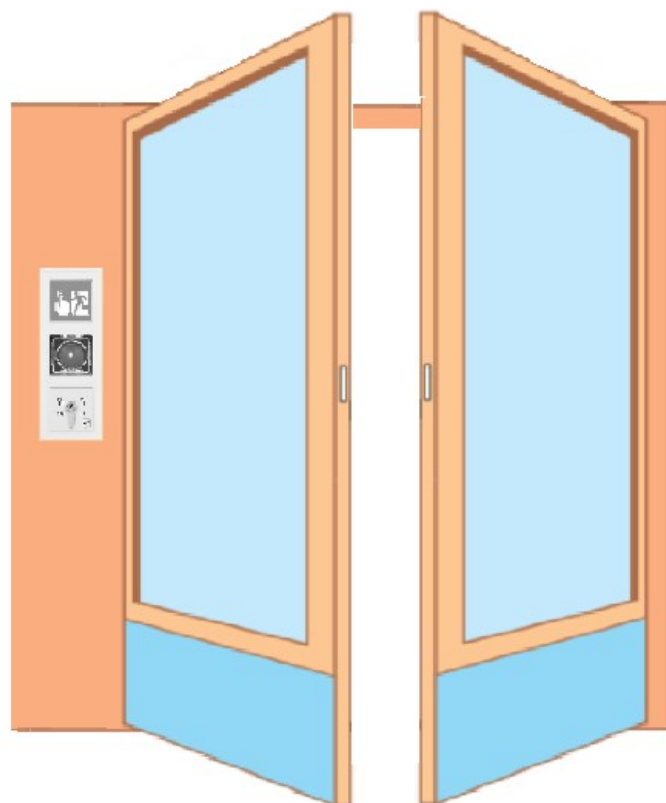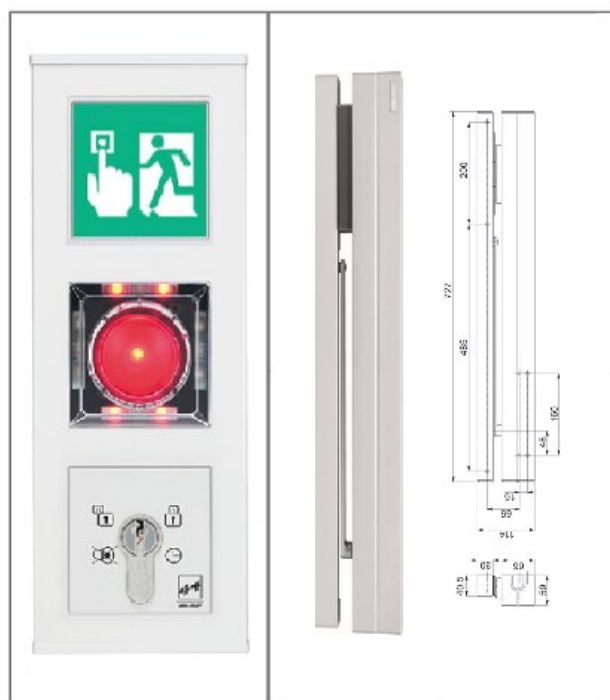

**Standard Double Door**

**No-Delay—Complies with BS EN 13637**

| QTY                | EDSDC-ND-DBL-S-IN |  |
|--------------------|-------------------|--|
| 1                  | 1386-12B7--04S0   | EDS - 1386 ERT SURFACE 24VDC WHITE   |
| 2                  | DC700F001F1EV1-   | DC700G-FT, DC AND 332 STRIKE IN HOUSING 24V DC, INWARD  |
| 1                  | 1386S00VT—00      | EDS INTERFACE FOR LOCKING DEVICE   |
| EDSDC-ND-DBL-S-OUT |                   |  |
| 1                  | 1386-12B7--04S0   | EDS - 1386 ERT SURFACE 24VDC WHITE   |
| 2                  | DC700F101F1EV1-   | DC700G-FT, DC AND 332 STRIKE IN HOUSING 24V DC, OUTWARD  |
| 1                  | 1386S00VT—00      | EDS INTERFACE FOR LOCKING DEVICE   |

**Technical Specification:**


Voltage—12V DC / 24V DC  
Voltage Range— +/- 10%  
Integrated 332 Strike and 807 Latch  
Monitoring Contact Integrated in the 332 Strike  
Closing Force—EN 3-6

**Standards:**

**BS EN 13637** Electrically Controlled Exit Systems  
Certified in compliance with BS EN 1154, size 3-6




**Escape Door Systems Lock Packages**  
**DC700F—Flush Mounted, No Delay**

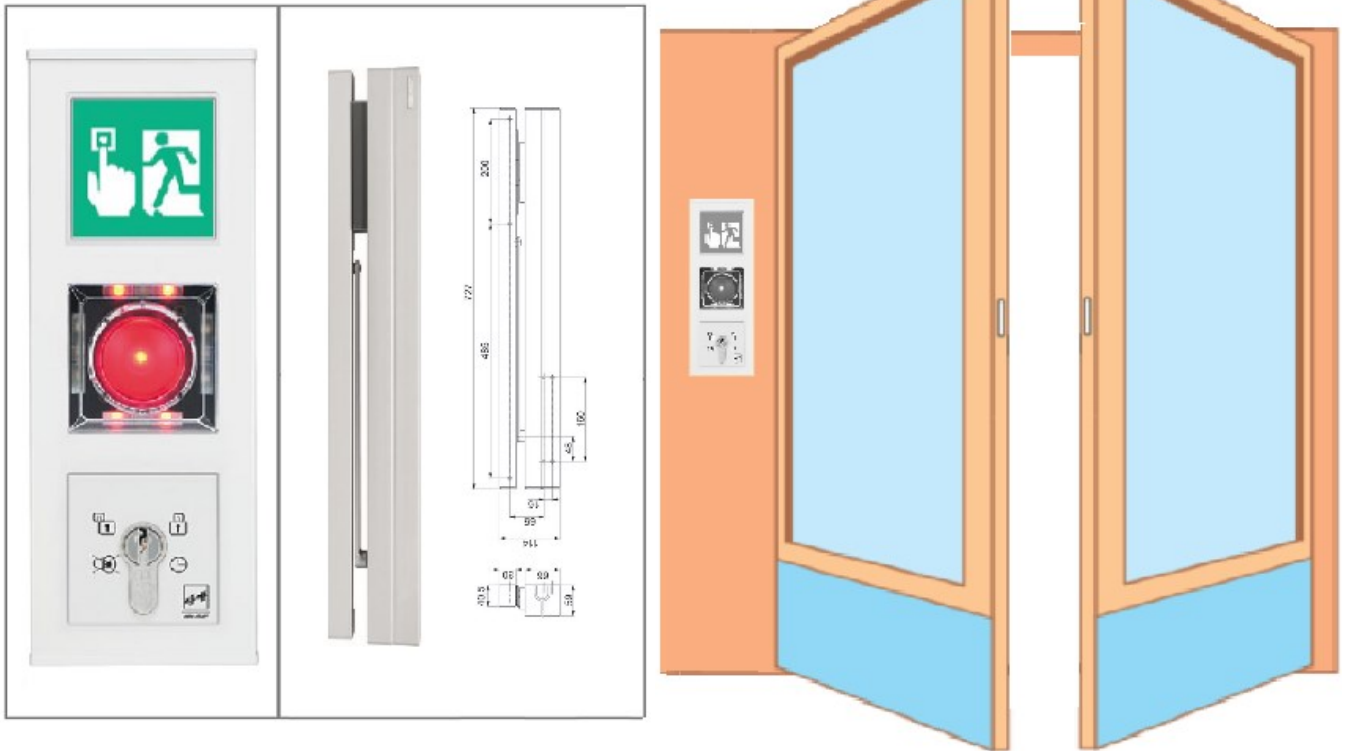

**Standard Double Door**

**No-Delay—Complies with BS EN 13637**

| QTY                | EDSDC-ND-DBL-F-IN |  |
|--------------------|-------------------|--|
| 1                  | 1386-12B3--04S0   | EDS - 1386 ERT FLUSH 24VDC WHITE   |
| 2                  | DC700F001F1EV1-   | DC700G-FT, DC AND 332 STRIKE IN HOUSING 24V DC, INWARD  |
| 1                  | 1386S00VT—00      | EDS INTERFACE FOR LOCKING DEVICE   |
| EDSDC-ND-DBL-F-OUT |                   |  |
| 1                  | 1386-12B3--04S0   | EDS - 1386 ERT FLUSH 24VDC WHITE   |
| 2                  | DC700F101F1EV1-   | DC700G-FT, DC AND 332 STRIKE IN HOUSING 24V DC, OUTWARD  |
| 1                  | 1386S00VT—00      | EDS INTERFACE FOR LOCKING DEVICE   |

**Technical Specification:**

Voltage—12V DC / 24V DC

Voltage Rating— +/- 10%

Integrated 332 Strike and 807 Latch

Monitoring Contact Integrated in the 332 Strike

Closing Force—EN 3-6

**Standards:**

BS EN 13637 Electrically Controlled Exit Systems

Certified in compliance with BS EN 1154, size 3-6

