


## Escape Door Systems Lock Packages

### 351U80 — Surface Mounted, T1 Delay

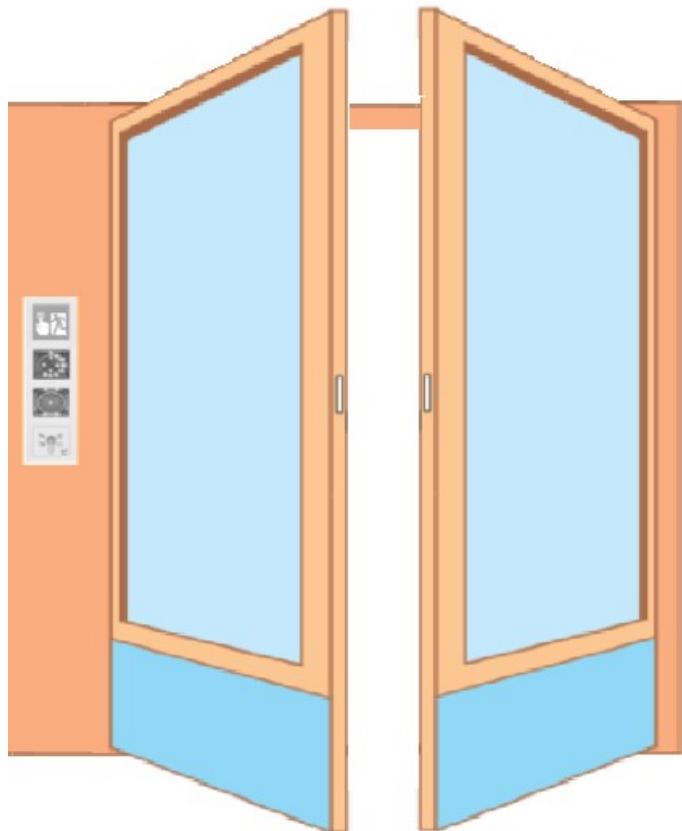

### Standard Double Door

### T1 Delay—Complies with BS EN 13637

<u>QTY</u>	<u>EDS351-T1-DBL-S-44</u>	
1	1386Z12B7--04S0	EDS - 1386 ERT SURFACE 12-24VDC WHITE—T1
2	351U80-SET44F91VA46	NEW ESCAPE LOCK W/LOCKING SNIB 24V C/W 44MM STRIKE
1	1386S00VT—00	EDS INTERFACE FOR LOCKING DEVICE
	<u>EDS351-T1-DBL-S-54</u>	
1	1386Z12B7--04S0	EDS - 1386 ERT SURFACE 12-24VDC WHITE—T1
2	351U80-SET54F91VA46	NEW ESCAPE LOCK W/LOCKING SNIB 24V C/W 54MM STRIKE
1	1386S00VT—00	EDS INTERFACE FOR LOCKING DEVICE

#### Technical Specification:

Voltage—24V

Voltage Rating—24V DC +/- 2V

Break In Resistance—5000N

Monitoring Contact and Armature Contact Integrated

Fail Unlocked—Yes

Non Handed

#### Standards:

BS EN 13637 Electrically Controlled Exit Systems



**Escape Door Systems Lock Packages****351U80 — Flush Mounted, T1 Delay****Standard Double Door****T1 Delay—Complies with BS EN 13637**

<u>QTY</u>	<u>EDS351-T1-DBL-F-44</u>	
1	1386Z12B3--04S0	EDS - 1386 ERT FLUSH12-24VDC WHITE—T1
2	351U80-SET44F91VA46	NEW ESCAPE LOCK W/LOCKING SNIB 24V C/W 44MM STRIKE
1	1386S00VT—00	EDS INTERFACE FOR LOCKING DEVICE
	<u>EDS351-T1-DBL-F-54</u>	
1	1386Z12B3--04S0	EDS - 1386 ERT FLUSH12-24VDC WHITE—T1
2	351U80-SET54F91VA46	NEW ESCAPE LOCK W/LOCKING SNIB 24V C/W 54MM STRIKE
1	1386S00VT—00	EDS INTERFACE FOR LOCKING DEVICE

**Technical Specification:**

Voltage—24V

Voltage Rating—24V DC +/- 2V

Break In Resistance—5000N

Monitoring Contact and Armature Contact Integrated

Fail Unlocked—Yes


Non Handed

**Standards:**

BS EN 13637 Electrically Controlled Exit Systems



## **Escape Door Systems Lock Packages DC700F—Surface Mounted, T1 Delay**

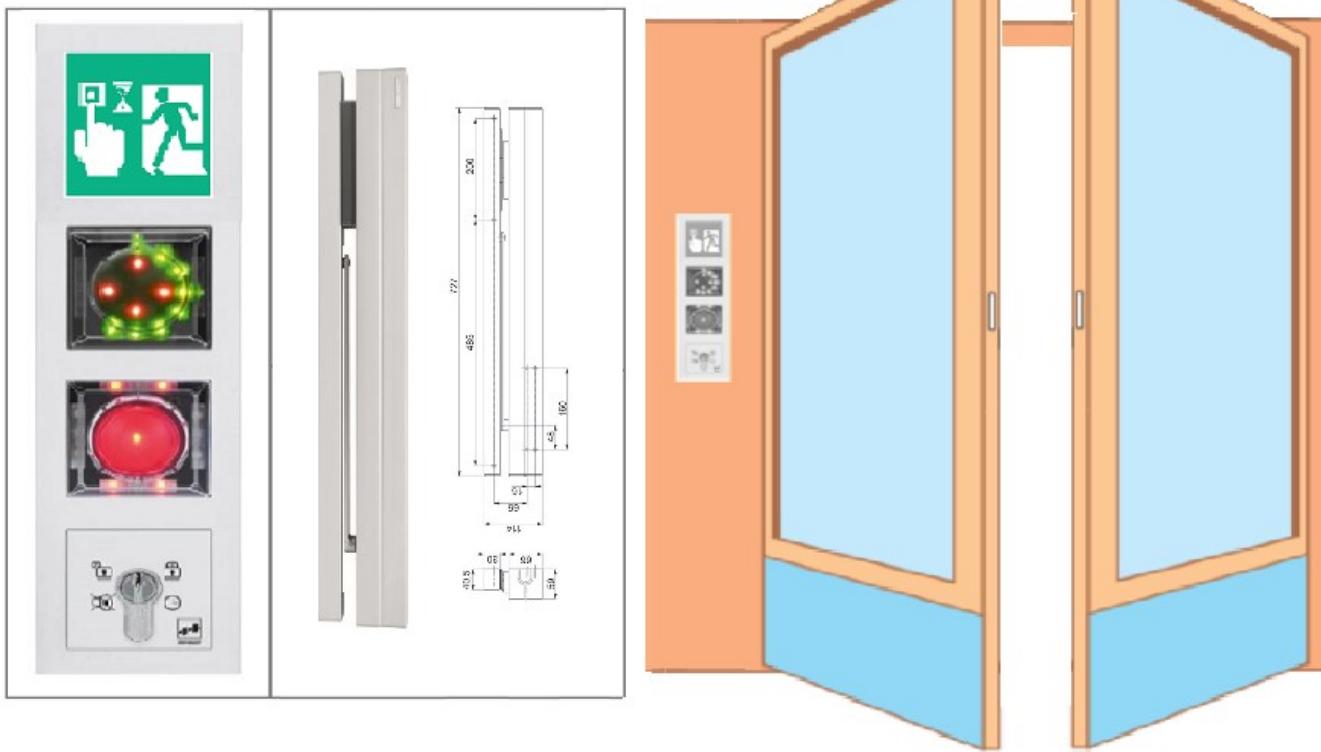

## **Standard Double Door**

## **T1 Delay—Complies with BS EN 13637**

<u>QTY</u>	<u>EDSDC-T1-DBL-S-IN</u>	
1	1386Z12B7--04S0	EDS - 1386 ERT SURFACE 12-24VDC WHITE—T1
2	DC700F001F1EV1-	DC700G-FT, DC AND 332 STRIKE IN HOUSING 24V DC, INWARD
1	1386S00VT—00	EDS INTERFACE FOR LOCKING DEVICE
	<u>EDSDC-T1-DBL-S-OUT</u>	
1	1386Z12B7--04S0	EDS - 1386 ERT SURFACE 12-24VDC WHITE—T1
2	DC700F101F1EV1-	DC700G-FT, DC AND 332 STRIKE IN HOUSING 24V DC, OUTWARD
1	1386S00VT—00	EDS INTERFACE FOR LOCKING DEVICE

## **Technical Specification:**

Voltage—12V DC / 24V DC

Voltage Rating— +/- 10%

Integrated 332 Strike and 807 Latch

Monitoring Contact Integrated in the 332 Strike

## Closing Force—EN 3-6


### **Standards:**

BS EN 13637 Electrically Controlled Exit Systems

Certified in Compliance with EN 1154, size 3-6



## **Escape Door Systems Lock Packages DC700F—Flush Mounted, T1 Delay**

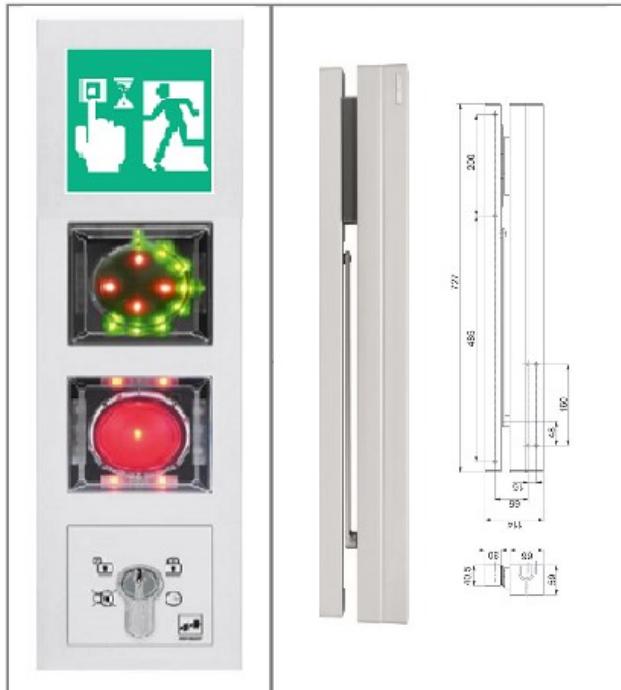

## **Standard Double Door**

## **T1 Delay—Complies with BS EN 13637**

<u>QTY</u>	<u>EDSDC-T1-DBL-F-IN</u>	
1	1386Z12B3--04S0	EDS - 1386 ERT FLUSH12-24VDC WHITE—T1
2	DC700F001F1EV1-	DC700G-FT, DC AND 332 STRIKE IN HOUSING 24V DC, INWARD
1	1386S00VT—00	EDS INTERFACE FOR LOCKING DEVICE
	<u>EDSDC-T1-DBL-F-OUT</u>	
1	1386Z12B3--04S0	EDS - 1386 ERT FLUSH12-24VDC WHITE—T1
2	DC700F101F1EV1-	DC700G-FT, DC AND 332 STRIKE IN HOUSING 24V DC, OUTWARD
1	1386S00VT—00	EDS INTERFACE FOR LOCKING DEVICE

## **Technical Specification:**

Voltage—12V DC / 24V DC

Voltage Rating— +/- 10%

## Integrated 332 Strike and 807 Latch

Monitoring Contact Integrated in the 332 Strike

## Closing Force—EN 3-6

## Standards:

BS EN 13637 Electrically Controlled Exit Systems

Certified in Compliance with EN 1154, size 3-6

