

# Roller protector **FSR 7000** [Outdoor]



Easy clip-on system





Side view, invisible screws




Door open, roller curtain extended

Door closed, roller curtain retracted

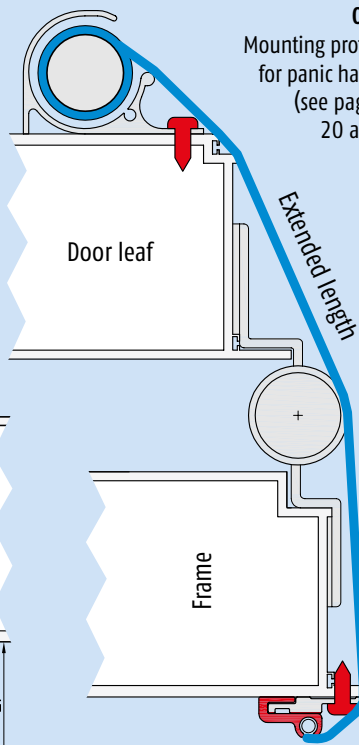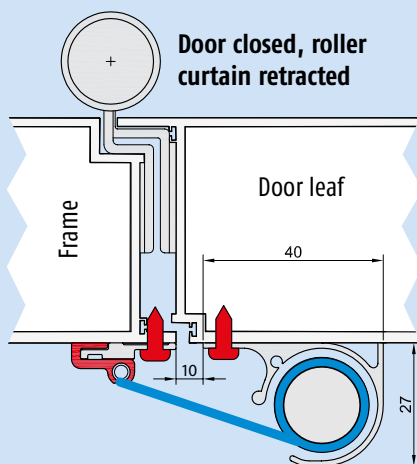

**Option:**  
Mounting profile LP1 for panic hardware (see pages 16, 20 and 21)

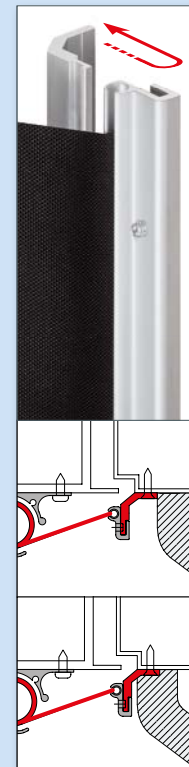

## Key features



- Quick fit roller protector (and removal)
- Specifically for external doors and wet areas, rust-free mechanism
- Hard-wearing synthetic fibre fabric
  - washable
  - difficult to ignite B1
  - mountable and removable
  - UV resistant
- **Installed without any screw heads being visible**
- Housing position adjustable (elongated holes)
- Suitable for almost all doors
- Certified and supervised quality (MPA)

## Materials



## Door types



## Certified quality



### Fabric colour

BLACK	OPTION WHITE
-------	--------------

### Housing colour

EV1 ANODISED	RAL-9016 WHITE	RAL-9007 GREY	RAL-7016 ANTHRACITE	STAINLESS STEEL ANOD.	Colour options	RAL/ANODISING
--------------	----------------	---------------	---------------------	-----------------------	----------------	---------------

### Technical data

<b>Standard length</b>	1925 mm (stock length)
<b>Automatic length</b>	2015 mm (stock length)
<b>Maximum supply length</b>	2500 mm
<b>Minimum length</b>	310 mm
<b>Shorten</b>	cannot be shortened
<b>Installation set</b>	universal screws included
<b>Extended length</b>	260 mm or 330 mm

### Specification text

**Planet roller-type finger protector FSR 7000 [OUTDOOR]** for safeguarding the non-hinge side at the secondary closing edge of swing doors. Roller-type protector that automatically maintains a constant tension. Weather resistant for use on external doors. With removable/mountable fabric cover for maintenance and cleaning or adjusting the hinges, drop-down seals, etc. Fixing elements on the door and frame side with oblong holes for re-adjusting the roller protector. Profi steel, powder coated RAL 9016, 9007, 7016 (please select). Cover of synthetic fibre, extended length 260 or 330 mm (please select), weather resistant and fire retardant B1 treated. Colours: black/white (please select). Standard length 1925 mm (for manually operated doors according to DIN 18101 with BRM 2000). Automatic length 2015 mm (for power operated doors according to DIN EN 16005) or fixed length between 310 mm and 2500 mm. (please select supply length)

