


# Planet RH → 13 x 30 mm | ↓ 27 mm | ≤ 44 dB

DOOR MATERIAL



## Main features

- Seal height up to ↓ 27 mm
- Acoustic insulation up to ≤ 44 dB in case of an optimal sealing
- For wavy, buckled, hollow, bevelled and uneven floor
- Soft silicone bevel lip seal
- Compensation of 15 mm in case of sloping floor at door width of 1000 mm
- Unilateral and soundless release, silent seal
- Due to parallel drop-down no trailing on the floor
- One groove width for Planet RH and HS (even floors)
- For double leaf folding doors with flush bolt or driving bar
- High-grade silicone lip, simple lift height adjustment
- Can be shortened up to the next shorter length on stock
- No extra need to cut off silicone at both ends
- 7 years warranty

## Versions / options

- Planet RH → RD ≤ 44 dB, smoke-shielding
- Planet RH → FH+RD ≤ 44 dB, fire-retardant + smoke-shielding
- DIN L or DIN R
- Option sliding door ≤ 44 dB
- Option Double-shortening → refer to chapter Accessories | TR125
- Special versions on request

## Door types with Planet RH




Double leaf doors → refer to chapter Accessories | Flush bolt, drilling

## More functions



## Technical specifications

Profile material	aluminum, → 13 x 30 mm
Groove size	□ width 13,1 mm with depth 30,5 up to 40 mm
Seal profile	high-grade silicone or high-grade self-extinguishing silicone
Seal height	up to ↓ 27 mm
Sound absorption value	up to ≤ 44 dB
Lift height adjustment	on the release knob with an Allen key 3 mm
Lengths in stock	335, 460, 585, 710, 835, 960, 1085, 1210, 1335 and 1460 mm
Special lengths	on request up to 6000 mm for wing- and sliding doors
Release	unilaterally on hinge side
Can be shortened	up to the maximum of 125 mm (335 mm only 115 mm)
Fastening	on the side with stainless steel angle brackets and screws
Frame protector plate	stainless, hammer fixed, 20 x 20 mm
Test approvals	on request

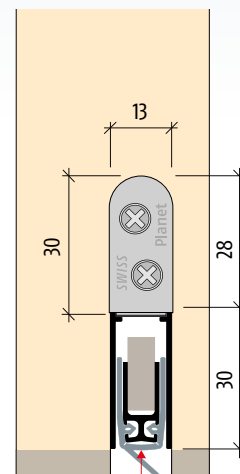

Seal height up to 27 mm

