

Mortice locks for emergency exit devices

pursuant to DIN 18251-1 Class 3


Series 21 APK

combining panic function E
+ automatic locking,
lock follower 8 mm



- follower in steel
- latch bolt in steel with head in nickel-plated malleable cast iron
- dead bolt in nickel-plated steel
- lock case wholly enclosed, galvanised
- delayed automatic deadlocking
- sound damping during automatic closure
- when the dead bolt is withdrawn, it is withdrawn earlier than the latch bolt
- can be combined with standard, knob or free-running cylinders
- angle of rotation of follower 32°

Mortice lock		ES
Series 21		21
PC 1-throw with latch retraction, Combination panic + automatic locking		APK
Flat forend	rounded edged	FR FK
Forend width	20 mm 24 mm	20 24
Forend length	235 mm 280 mm*	235 280
Backset	55 mm 60 mm 65 mm 80 mm	55 60 65 80
Centres	72 mm PC	72
Follower	8 mm □	08
Handing	right (RH) left (LH)	RS LS
Forend version	Stainless Steel	EST

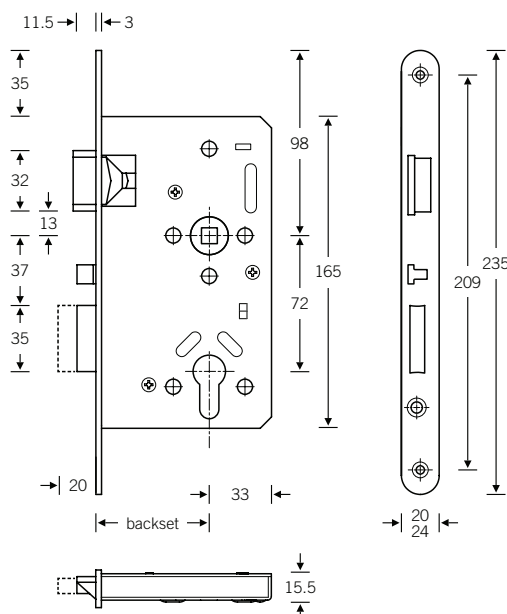

Classification key

pursuant to EN 12209:
3 S 5 0 0 C 3 B B 2 0

* with 4 fixing holes

