


Mortice locks for heavy-duty and fire doors

pursuant to DIN 18251-1 Class 3

as latch lock with latch retraction
and anti-thrust latch

- self-tightening follower in steel, galvanised
- follower bearing in polyamide
- latch bolt fine steel casting, nickel-plated
- auxiliary latch bolt as nickel-plated casting or in polyamide
- lock case wholly enclosed
- chip guards in the area of the lever handle
- regreasing device

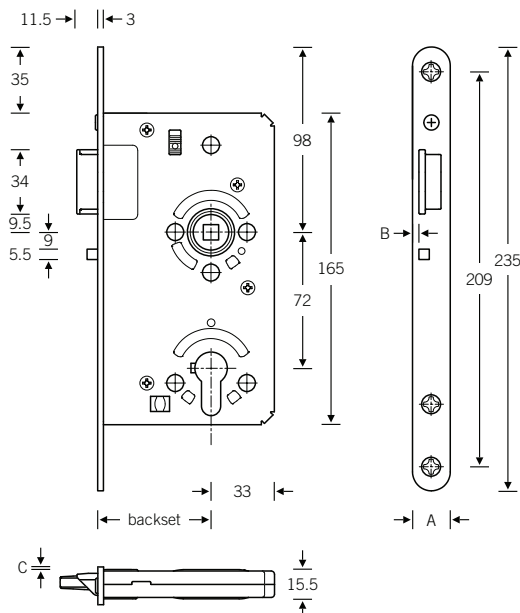

Dim. A Dim. B Dim. C

20.0 3.4 1.4
24.0 6.0 4.0

Classification key

pursuant to EN 12209:
3 M 5 1 0 F 3 B A 2 0

Mortice lock		ES
Series 50 for full leaf steel doors		50
Series 53		53
Latch lock with latch retraction		FSW
Anti-thrust latch		FSP
Flat forend	rounded edged	FR FK
Forend width	20 mm 24 mm	20 24
Forend length	235 mm	235
Backset	55 mm 60 mm 65 mm 70 mm 80 mm	55 60 65 70 80
Centres	72 mm PC	72
Follower	8 mm □ 9 mm □ FH	08 09
Handing	right (RH) left (LH) latch bolt reversible RH/LH* (Series 50)	RS LS
Forend material	Stainless Steel AISI 304 Bronze** Brass** (further materials to order)	EST BZ MS
Sound damping for latch bolt		FG

