


Mortice locks for heavy-duty and fire doors

pursuant to DIN 18251-1 Class 4

Series 54

for heavily-used heavy-duty doors

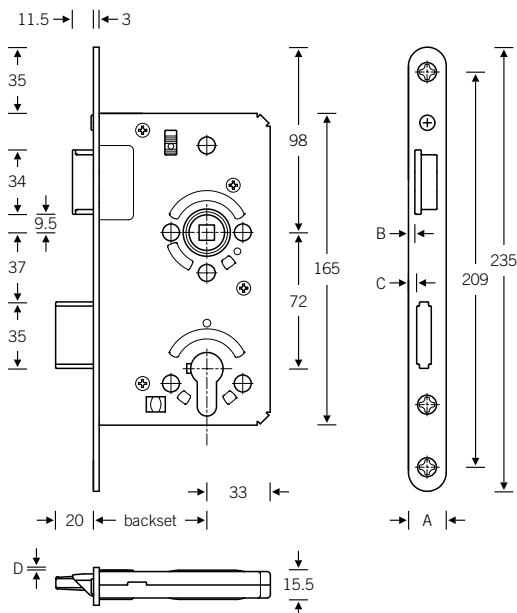

- self-tightening follower in steel, galvanised
- steel-ring follower bearing
- latch bolt nickel-plated steel investment casting
- dead bolt in steel, bolt head as nickel-plated casting
- lock case wholly enclosed, galvanised
- chip guards
- regreasing device

Mortice lock		ES
Series 54		54
PC 2-throw with latch retraction Bathroom variant		PZW WC
Flat forend	rounded edged	FR FK
Forend width	20 mm 24 mm	20 24
Forend length	235 mm 280 mm*	235 280
Backset	55 mm 60 mm 65 mm 50 mm 70 mm 80 mm 100 mm	55 60 65 50 70 80 100
Centres	72 mm PC 78 mm WC 74 mm RC 22 mm	72 78 74
Follower	8 mm □ 9 mm □ FH 10 mm □	08 09 10
Handing	right (RH) left (LH)	RS LS
Forend material	Stainless Steel AISI 304 Bronze** Brass** (further materials to order)	EST BZ MS
Sound damping for latch bolt		FG

Dim. A Dim. B Dim. C Dim. D

20.0 3.4 4.0 1.4
24.0 6.0 6.6 4.0

Classification key

pursuant to EN 12209:
3 S 5 1 0 G 6 B C 2 0

Series 54 FSP with anti-thrust latch see p 21
Series 54 NV with follower angle adjustment see p 24
Series 54 KF with cranked latch bolt see p 26
Series 54 RoF with roller latch and dead bolt see p 27

* with 4 fixing holes
** not in FH variant

