

# Mortice locks for heavy-duty and fire doors

## pursuant to DIN 18251-1 Class 5


### Series 52

for full leaf steel doors, centre variant, non-handed,  
for very frequently used heavy-duty doors  
and enhanced resistance to burglary



- self-tightening follower in steel, galvanised
- steel-ring follower bearing
- latch bolt fine steel casting, nickel-plated
- latch bolt with sound damping
- dead bolt in special-grade hardened and tempered steel, bolt head as nickel-plated casting
- lock case wholly enclosed, galvanised
- chip guards
- regreasing device

Mortice lock		ES
Series 52		52
PC 2-throw with latch retraction Bathroom variant		PZW WC
Flat forend	rounded edged	FR FK
Forend width	20 mm 24 mm	20 24
Forend length	235 mm 280 mm*	235 280
Backset	55 mm 60 mm 65 mm 50 mm 70 mm 80 mm 100 mm	55 60 65 50 70 80 100
Centres	72 mm PC 78 mm WC 74 mm RC 22 mm	72 78 74
Follower	8 mm □ 9 mm □ FH 10 mm □	08 09 10
Handing	latch bolt reversible RH/LH	
Forend material	Stainless Steel AISI 304 Bronze** Brass** (further materials to order)	EST BZ MS

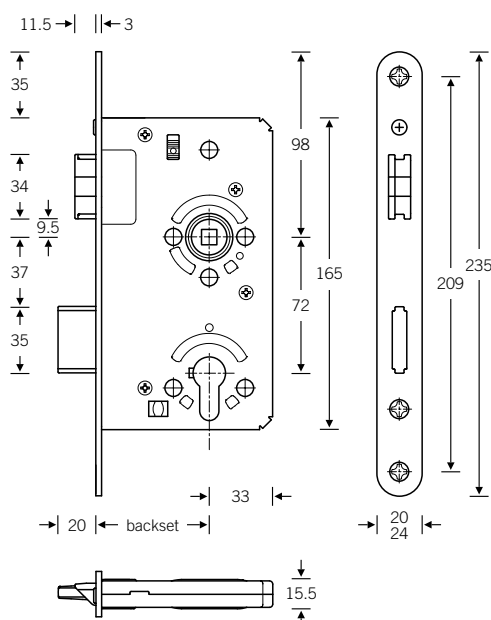

\* with 4 fixing holes  
\*\* not in FH variant

Classification key

pursuant to EN 12209:  
3 S 5 1 0 G 6 B C 2 0

