


# Planet BL (Radiation protection)

→ 13 x 39 mm | ↓ 18 mm | ≪ 31 dB

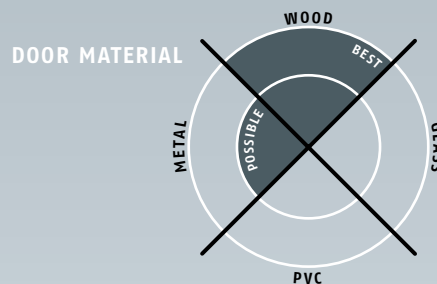

## Main features

- Seal height up to ↓ 18 mm
- Appropriate for radiation protection doors
- Unilateral and soundless release, silent seal
- Due to parallel drop-down no trailing on the floor
- Automatic compensation at inclined floors
- Simple lift height adjustment
- Produced on fix measure from 335 up to 6000 mm
- 7 years warranty

## Versions / options


- With lead lining from 0,5 up to 4 mm (choose same lead thickness as in the door)
- Prepared with drilling ∅ 5 x 13 mm (only possible with lead lining up to 2 mm, min. length 400 mm)

## Door types with Planet BL



Double leaf doors → refer to chapter Accessories | Flush bolt, drilling

## More functions

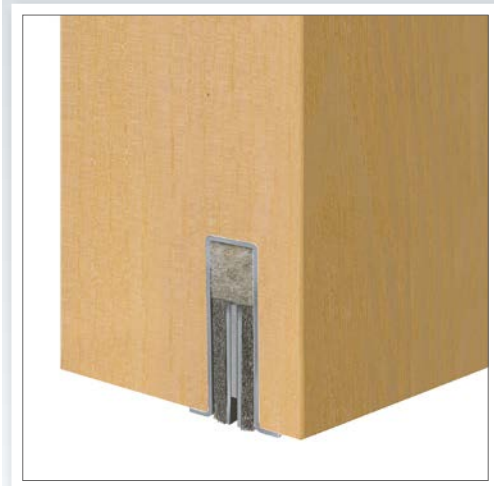

## Technical specifications

Lead lining	0,5   1,0   1,5   2,0   3,0   4,0 mm (choose same lead thickness as in the door)
Profile material	aluminum, → 13 x 39 mm
Groove size	□ width 13,1 mm with depth 40 mm
Seal height	up to ↓ 18 mm
Lift height adjustment	on the release knob with an Allen key 3 mm
Lengths	335–6000 mm on fix measure per meter
Release	unilaterally on hinge side
Can be shortened	yes, on request only
Fastening	unilaterally from the bottom with nails / screws available with customer
Frame protector plate	stainless, hammer fixed, 20 x 20 mm
Test approvals	on request

